



Amodel[®] AS-1933 HS

polyphthalamide

Amodel AS-1933 HS is a 33% glass reinforced grade of polyphthalamide (PPA) resin developed specifically for improved performance in a 50/50 ethylene glycol and water environment. This material exceeds the performance required by the automotive industry for polymeric materials exposed to antifreeze at 226°F (108°C), even when tested at 275°F (135°C).

Potential applications include a variety of automotive components such as thermostat housings, heater core

endcaps, heater hose connectors, and water inlets, outlets and valves.

- Black: AS-1933 HS BK 324


General

Material Status	• Commercial: Active
Availability	• Africa & Middle East • Asia Pacific • Europe • North America • South America
Filler / Reinforcement	• Glass Fiber Reinforcement, 33% Filler by Weight
Additive	• Heat Stabilizer
Features	• Antifreeze Resistant • Glycol Resistant • Good Chemical Resistance • Good Creep Resistance • Good Dimensional Stability • Good Stiffness • Heat Stabilized • High Heat Resistance • High Strength
Uses	• Automotive Applications • Automotive Under the Hood • Housings • Industrial Applications • Industrial Parts • Machine/Mechanical Parts • Metal Replacement • Power/Other Tools • Thick-walled Parts • Valves/Valve Parts
RoHS Compliance	• RoHS Compliant
Automotive Specifications	• ASTM D4000 PA121 G35 Color: BK324 Black • BOSCH N28 BN05-OX1 Color: BK324 Black • CHRYSLER MS-DB478 Type A CPN4116 Color: Black • FORD WSS-M4D861-A3 Color: BK324 Black • ISO 1874 PA6T/6I/66, MH, 12-120, GF33 Color: BK324 Black • PSA Peugeot-Citroën SPA X62 4203 • VALEO PDT NVB 10 057 Color: BK324 Black
Appearance	• Black
Forms	• Pellets
Processing Method	• Injection Molding


Physical	Typical Value	Unit	Test Method
Density	1.45	g/cm ³	ISO 1183/A
Molding Shrinkage			ASTM D955
Flow	0.20	%	
Across Flow	0.60	%	
Mechanical	Typical Value	Unit	Test Method
Tensile Modulus			
-- ¹	7580	MPa	ASTM D638
--	11700	MPa	ASTM D638

Mechanical	Typical Value	Unit	Test Method
--	12600	MPa	ISO 527-2
Tensile Strength			
Break ¹	75.8	MPa	ASTM D638
Break	221	MPa	ASTM D638
Break	212	MPa	ISO 527-2
Tensile Elongation (Break)	2.5	%	ASTM D638 ISO 527-2
Flexural Modulus			
--	10800	MPa	ASTM D790
--	10600	MPa	ISO 178
Flexural Strength			
--	309	MPa	ISO 178
Yield	313	MPa	ASTM D790
Impact	Typical Value	Unit	Test Method
Charpy Notched Impact Strength	10	kJ/m ²	ISO 179/1eA
Charpy Unnotched Impact Strength	76	kJ/m ²	ISO 179/1eU
Notched Izod Impact			
-- ¹	53	J/m	ASTM D256
--	91	J/m	ASTM D256
--	9.5	kJ/m ²	ISO 180/1A
Thermal	Typical Value	Unit	Test Method
Deflection Temperature Under Load			
1.8 MPa, Unannealed	277	°C	ASTM D648
1.8 MPa, Unannealed	278	°C	ISO 75-2/Af
Melting Temperature	312	°C	ISO 11357-3
Injection	Typical Value	Unit	
Drying Temperature	121	°C	
Drying Time	4.0	hr	
Suggested Max Moisture	0.10	%	
Hopper Temperature	79.4	°C	
Rear Temperature	304 to 318	°C	
Front Temperature	316 to 329	°C	
Processing (Melt) Temp	321 to 343	°C	
Mold Temperature	135	°C	

Isothermal Stress vs. Strain (ISO 11403-1)

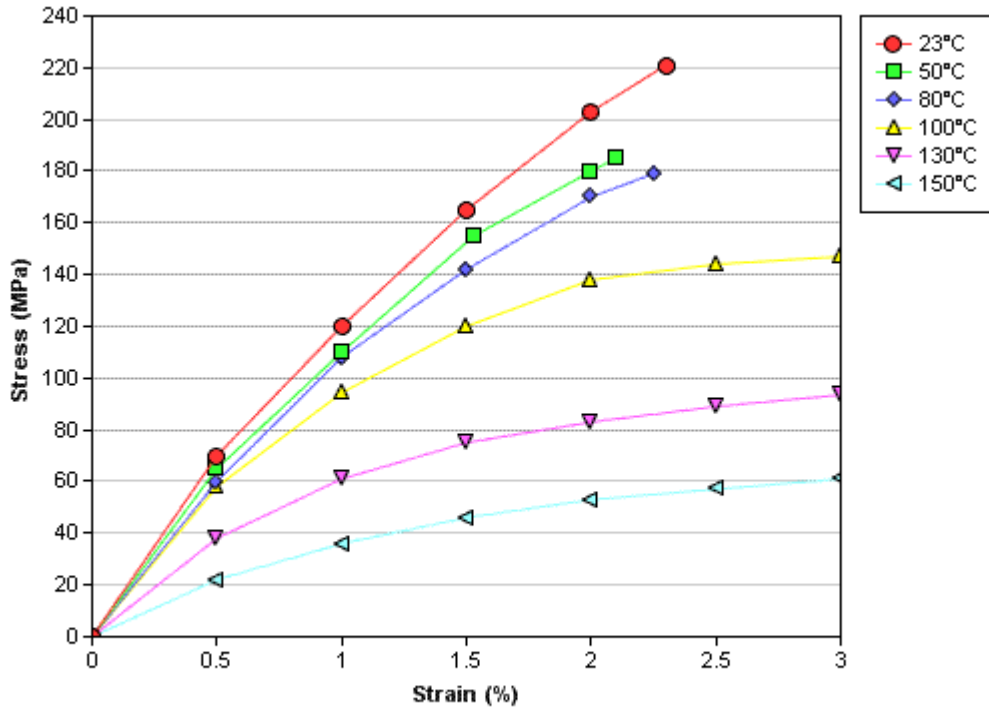

Secant Modulus vs. Strain (ISO 11403-1)

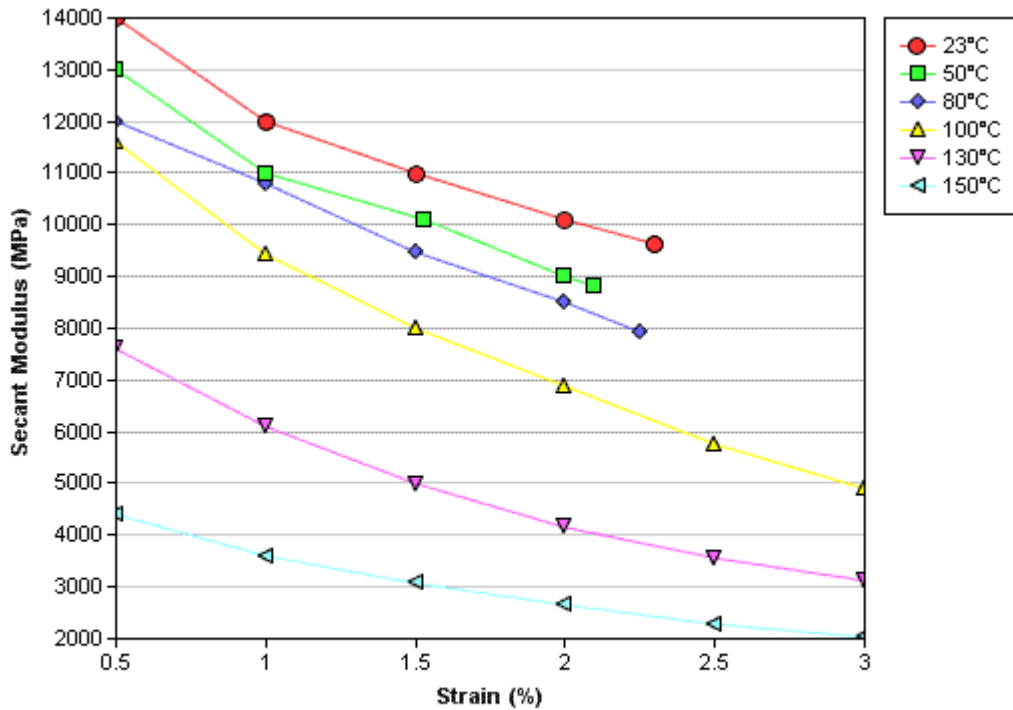

Notes

Typical properties: these are not to be construed as specifications.

¹ After Immersion in 50/50 Glycol/Water Mixture for 1,000 hours at 275°F (135°C)

For assistance with an emergency involving products of Solvay Advanced Polymers, such as a spill, leak, fire, or explosion, call day or night:

Emergency Health Information

USA +1.800.621.4590

International +1.770.772.8577

Emergency Spill Information

USA +1.800.424.9300 / +1.703.527.3887
(CHEMTREC)

Europe +44 208.762.8322 (CARECHEM)

China +86.10.5100.3039

All other Asian countries +65.633.44.177

For additional product information, technical assistance, and Material Safety Data Sheets (MSDS), call:

USA + 1.800.621.4557/ +1.770.772.8760

Europe +49.211.5135.9000

Japan +81.3.5425.4300

China & Southeast Asia +86.21.5080.5080

World Headquarters

Solvay Advanced Polymers, L.L.C.
4500 McGinnis Ferry Road
Alpharetta, GA 30005 USA
+1.800.621.4557 (U.S.A.)
+1.770.772.8760

SOLVAY
Advanced Polymers



MORE PLASTICS WITH MORE PERFORMANCE™

Solvay Advanced Polymers has many locations around the world. Please visit our website for the office nearest you, or email advancedpolymers@solvay.com for assistance. www.solvayadvancedpolymers.com

Material Safety Data Sheets (MSDS) for products of Solvay Advanced Polymers are available upon request from your sales representative or by emailing us at advancedpolymers@solvay.com. Always consult the appropriate MSDS before using any of our products.

Property values for individual batches will vary within specification limits. Unless otherwise noted, values shown are typical for uncolored resin; colorants may alter values. For Preliminary Data Sheets, values are typical of limited production and specifications are not yet established.

To our actual knowledge, the information contained herein is accurate as of the date of this document. However, neither Solvay Advanced Polymers, LLC nor any of its affiliates makes any warranty, express or implied, including merchantability or fitness for use, or accepts any liability in connection with this information or its use. Only products designated as part of the Solviva® family of biomaterials may be considered as candidates for implantable medical devices; Solvay Advanced Polymers does not allow or support the use of any other products in any implant applications. This information is for use by technically skilled persons at their own discretion and risk and does not relate to the use of this product in combination with any other substance or any other process. This is not a license under any patent or other proprietary right. The use of this product resides on the determination of the customer not Solvay Advanced Polymers. The customer must determine suitability of any information or material for any contemplated use, the manner of use and whether any patents are infringed. This information gives typical properties only and is not to be used for specification purposes. Solvay Advanced Polymers reserves the right to make additions, deletions, or modifications to the information at any time without prior notification.

All trademarks and registered trademarks are the property of Solvay Advanced Polymers, LLC, an affiliate of Solvay SA.

© 2010 Solvay Advanced Polymers, LLC. All rights reserved.